

Hiab Multilift

XR Low-built hooklifts




TECHNICAL INFORMATION

XR20SL

TECHNICAL DATA

TYPE	XR 20SL						
VEHICLE TYPE	3-axle						
GVW OF THE VEHICLE (t)	26						
CAPACITY (t)	20						
G-LENGTH	49	51	52	53	56	59	61
SYSTEM WEIGHT (kg) *	2210	2270	2320	2380	2400	2450	2460
TIPPING ANGLE (°)	56	52	52	55	52	52	52
MAX. OPERATING PRESSURE (MPa)	30						
RECOMMENDED MAX. OIL FLOW (l/min)	100						

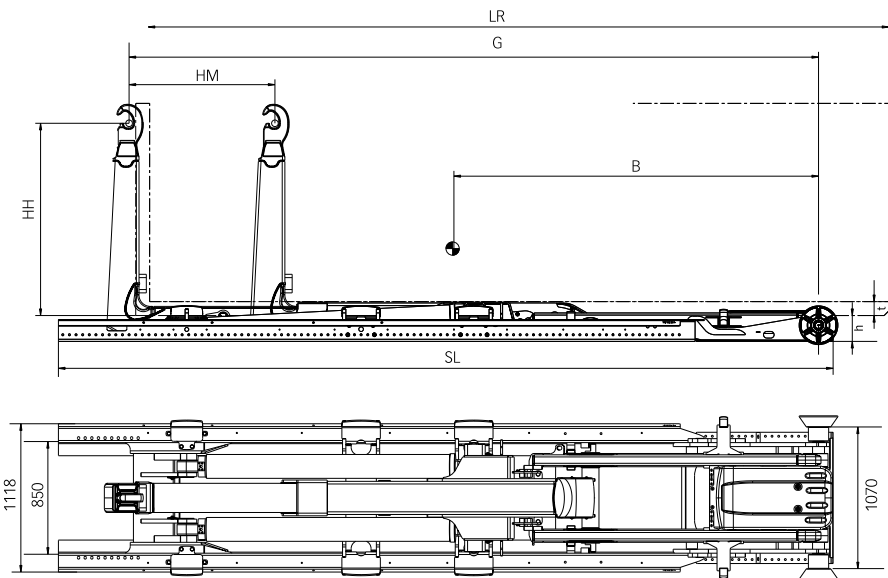

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

PRIMARY DIMENSIONS

MODEL	XR20SL.49	XR20SL.51	XR20SL.52	XR20SL.53	XR20SL.56	XR20SL.59	XR20SL.61
LR = BODY LENGTH (m) min - max	4,1 - 5,9	4,3 - 6,1	4,4 - 6,2	4,5 - 6,4	4,8 - 6,6	4,9 - 6,9	4,9 - 7,1
SL = SUBFRAME LENGTH (mm) **	5543	5843	5843	6143	6443	6443	6593
B = CENTRE OF GRAVITY (mm)	2885	3000	3070	3150	3300	3400	3500
G = EXACT G-LENGTH (mm)	4870	5100	5240	5380	5600	5900	6100
HM = HORIZONTAL MOVEMENT (mm)	1100	1100	1100	1100	1100	1250	1450
t = MIN. FREE TUNNEL HEIGHT (body) (mm)	105						
h = INSTALLATION HEIGHT (mm)	195						
HH = HOOK HEIGHT (mm)	1570 (special 1425 / 1450)						

Cargotec improves the efficiency of cargo flows on land and at sea – wherever cargo is on the move. Cargotec's daughter brands Hiab, Kalmar and MacGregor are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. www.cargotec.com



Cargotec Finland Oy
 Nesteentie 36, P.O.Box 39
 FI-21201 Raisio, Finland
 tel. +358 204 55 2399
 fax +358 204 55 2231
www.hiab.com